



SOLERA

Beneficios

- Uniformidad
- Alta ductilidad
- Refuerza la unión de las estructuras metálicas

Especificaciones

- Grado A-36
- Se manejan en largos de 6.10 m y algunas medidas en 12.20 m

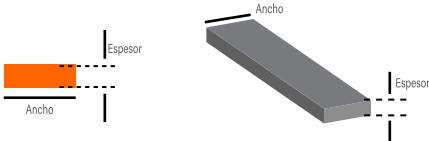

Dimensiones				Peso	
Pulgadas		mm			
Espesor	Ancho	Espesor	Ancho	kg/m	lb/pie
1/8	1/2	3.20	12.70	0.31	0.21
	3/4		19.10	0.47	0.32
	1		25.40	0.63	0.43
	1 1/4		31.70	0.79	0.53
	1 1/2		38.10	0.95	0.64
	2		50.80	1.26	0.85
3/16	1/2	4.80	12.70	0.47	0.32
	3/4		19.10	0.71	0.48
	1		25.4	0.94	0.64
	1 1/4		31.70	1.18	0.80
	1 1/2		38.10	1.42	0.96
	2		50.80	1.90	1.28
1/4	2 1/2	6.30	63.50	2.37	1.59
	1/2		12.70	0.63	0.43
	3/4		19.10	0.95	0.64
	1		25.40	1.26	0.85
	1 1/4		31.70	1.58	1.06
	1 1/2		38.10	1.90	1.28
	2		50.80	2.53	1.70
	2 1/2		63.50	3.17	2.13
	3		76.20	3.79	2.55
	4		101.60	5.06	3.40
	5		127.00	6.32	4.25
	6		152.40	7.59	5.10
5/16	8		203.20	10.12	6.80
	10*		254.00	12.65	8.50
	12*		304.80	15.18	10.20
	1	7.90	25.40	1.58	1.06
	1 1/4		31.70	1.97	1.33
	1 1/2		38.10	2.37	1.59
	2		50.80	3.16	2.13
	2 1/2		63.50	3.95	2.66
	3		76.20	4.79	3.22
	4		101.60	6.32	4.25
	5		127.00	7.90	5.31
	6		152.40	9.49	6.38

Pregunta a tu ejecutiva de ventas las medidas estándar en stock, fabricaciones especiales, acabados y calibres disponibles.